







# CEILING LIGHTS

## Manual




### General Safety Information

- Installation, commissioning and maintenance only by qualified electrician.
- Never perform any work on the luminaire with voltage applied.  
Danger to life due to electric shock!
- Electric connection must be appropriate according to all applicable standards and other national and international safety and accident prevention regulations.
- Damaged luminaires must not be operated.
- Observe and retain safety instructions and mounting instructions.
- No liability is accepted for damages resulting from improper use.
- Use genuine parts only for repair.

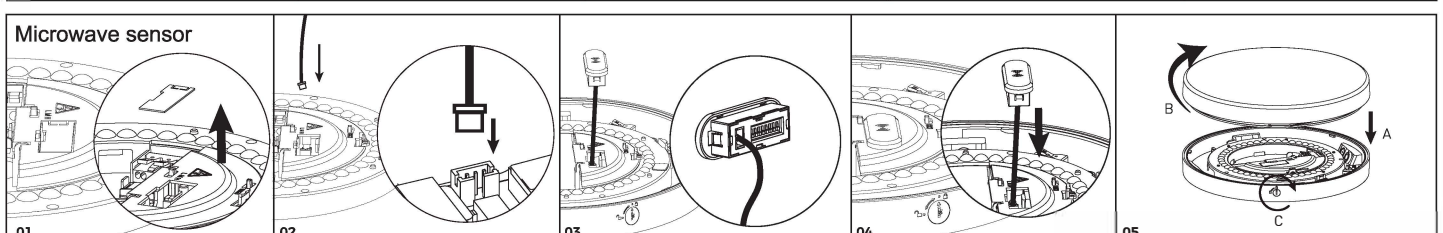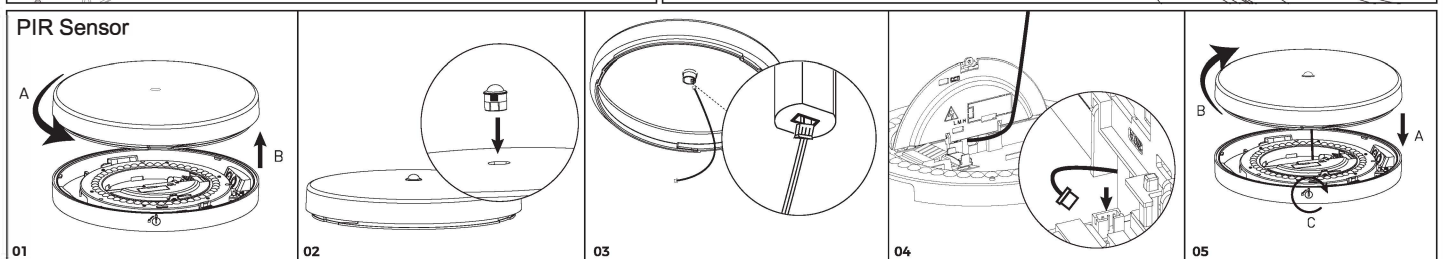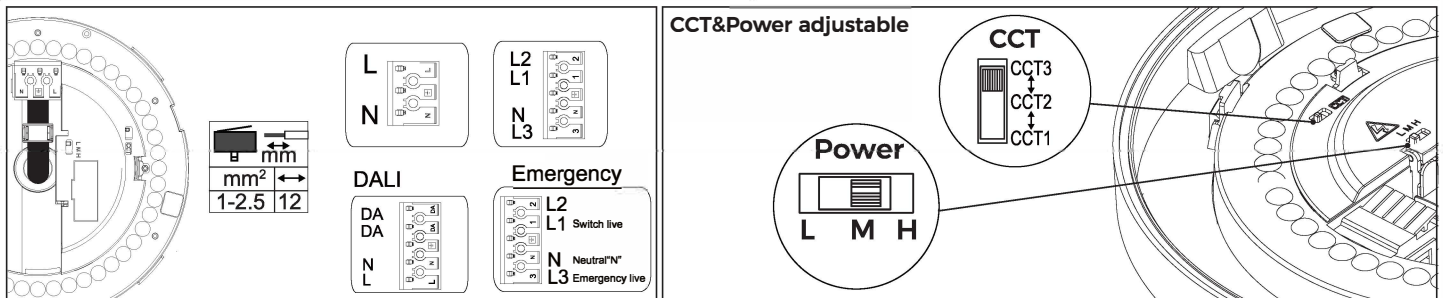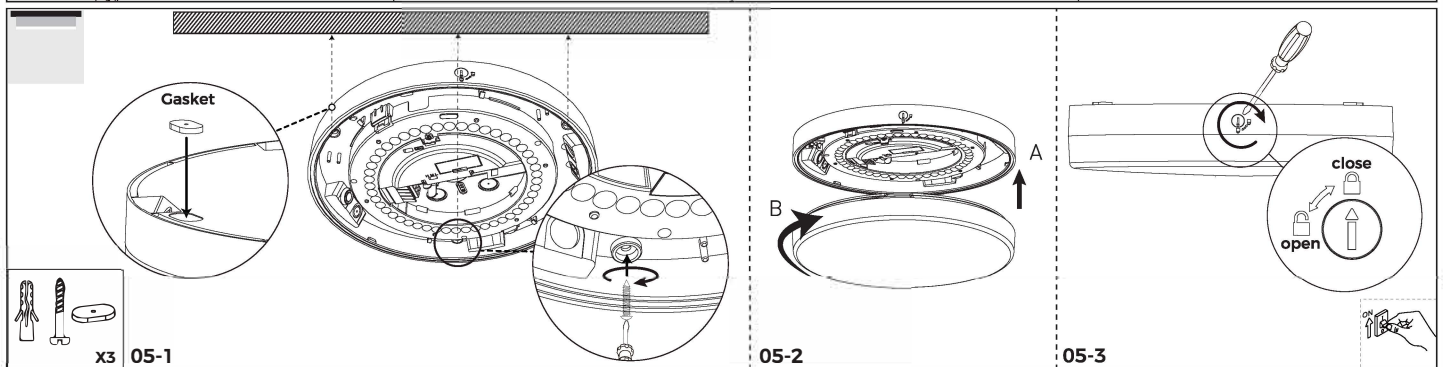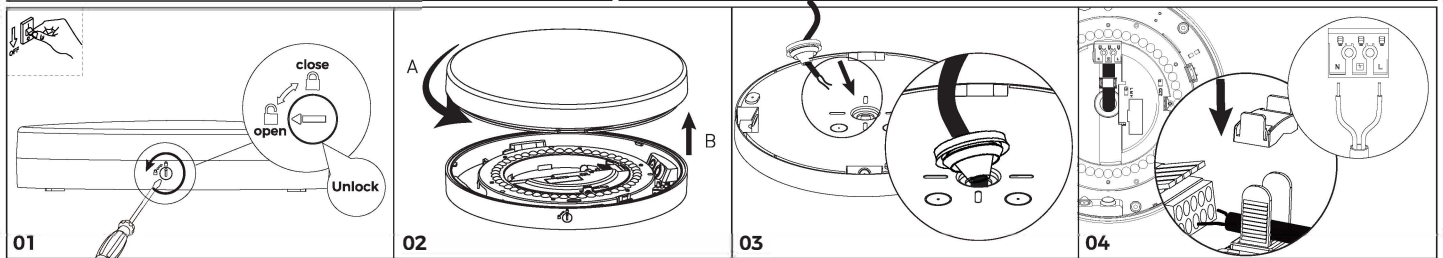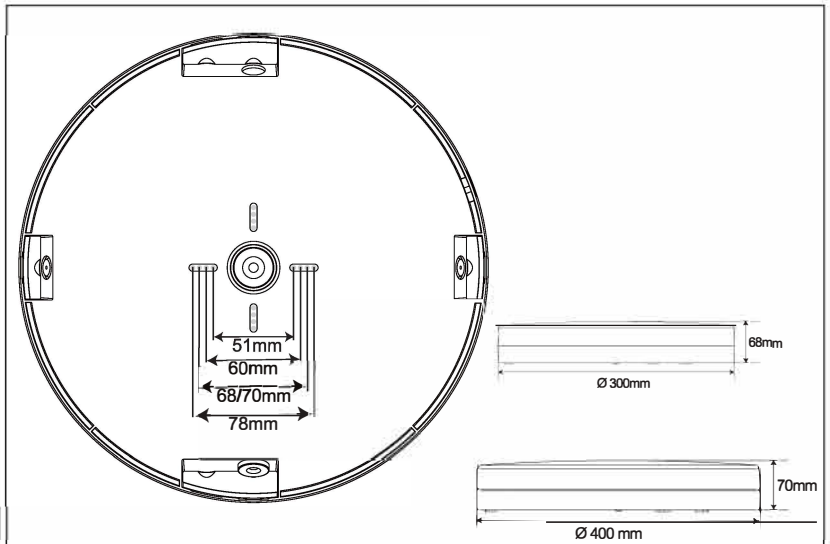


Emergency module




Battery

Converter


Emergency indicator

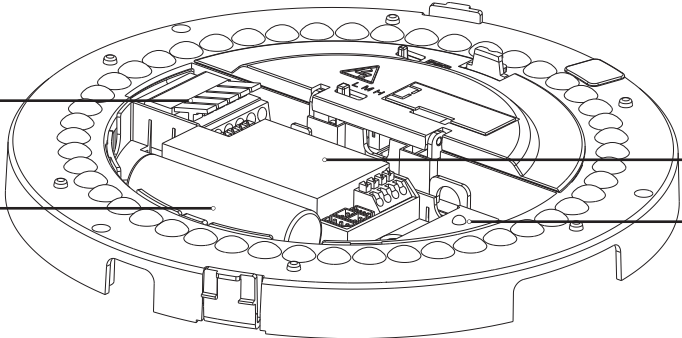

Retrofit solution with magnet

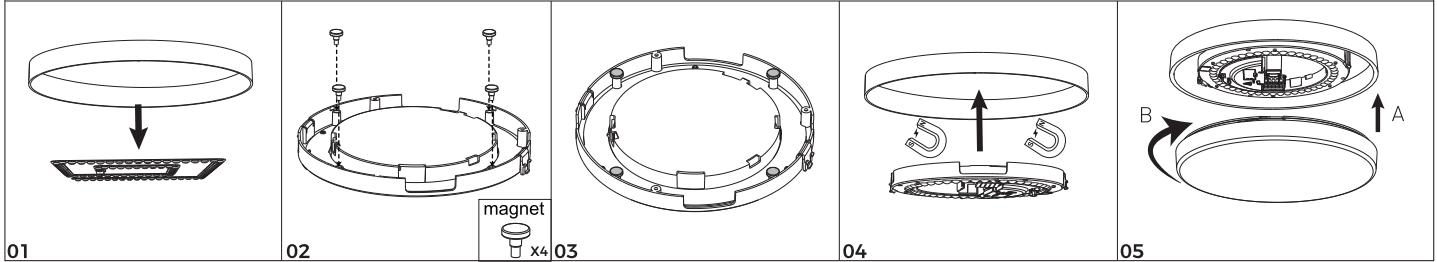


Circuit breakers




	B10	B16	C10	C16
300mm	26	42	44	71
400mm	23	37	38	62

Linkable qty



SIZE	NX	NX	NX
300mm	75(10W)	62(12W)	50(15W)
400mm	50(15W)	37(20W)	30(25W)

CCT	EET
4000/5000K	B
3000/6500K	C



Replaceable (LED only) light source by a professional.



Replaceable control gear by a professional.

This product contains a light source of energy efficiency class <B> / <C>.

Replace the module driver

Replace the module LED

